



FREE-STANDING HEAVY DUTY

PLF7P, PLF13P, PLF13PL

Suggested Specification

Cabinet finish shall be Sandstone **powder coated paint** on galvanized steel or brushed stainless steel. Cooling system shall use R-134a refrigerant. Shall be listed by Underwriter's Laboratories to U.S. and Canadian standards and conform to European Union Directives.

Models

PLF7P is ultraquiet and delivers 7 gph of chilled drinking water.

PLF13P delivers 13.3 gph of chilled drinking water.

PLF13PL is 30 5/16" high for the convenience of children, and serves 13.3 gph of chilled drinking water.

Standard Features


- Waterways are Lead-Free in material & Construction
- Dial-A-Drink® Bubbler
- Stainless Steel Top
- Heavy-Gauge Steel Cabinet With Separate Base
- High-Efficiency Cooling Tank and Coil
- Refrigerant 134a
- Limited 5-Year Warranty

Finishes

- Standard Cabinet Finish: Sandstone powder coated paint on Galvanized steel.
- Optional finishes at extra cost: Stainless Steel, Powder coated paint.



Components in these water coolers are lead free as defined by the Safe Water Act Amendments of 1986, and the Lead Contamination Control Act of 1988.

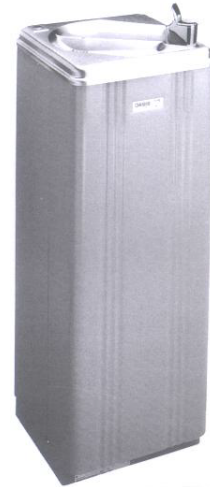

Accessories

- Glass Fillers: Push handle (029603-004)
- Glass Fillers: Push back (029603-005)
- Glass Fillers: Push down (029603-006)
- Kit 031505-001 is required for Field Installation for the above glass fillers
- Foot pedal operated

Installation

- Prior to roughing-in, consult local, state and federal codes.
- Shipped with complete instructions.

Limited 5-Year Warranty (Continental limits of the United States and Canada): Five years on the sealed refrigeration system and most components parts. Detailed warranty certificate enclosed with each water cooler; sample available upon request.

Export Warranty: One year on the sealed refrigeration system and most components parts. Four-year replacement contract on sealed refrigeration system. Detailed warranty certificate enclosed with each water cooler; sample available upon request.

Models covered by this specification complies with all known Plumbing Codes. Listed by Underwriter's Laboratories to U.S. and Canadian standards and conform to European Union Directives.



NSF certified

Model	50° F Drinking Water 90° F Ambient Air Temp*			Hot'N Cold™ Model	115 Volts, 60HZ			Glass Filler Acc. Option	Cabinet Color Option	Net Wt. Approx.
	Rated Capacity GPH	Base Rate GPH	Pre-Cooler		Compr. HP	Full Load Amps	Rated Watts			
PLF7P	7.0	3.5	YES	NO	1/8	2.5	200	YES	YES	73 Lbs.
PLF13P	13.3	7.0	YES	YES	1/5	4.7	300	YES	YES	80 Lbs.
PLF13PL	13.3	7.0	YES	NO	1/5	4.7	300	YES	YES	70 Lbs.

*Air Conditioning and Refrigerant Institute Standard Rating Condition 80° F inlet water temperature.

OASIS® FREE-STANDING HEAVY DUTY WATER COOLER MODELS PLF7P, PLF13P, PLF13PL

ALL DIMENSIONS ARE IN INCHES.
 DIMENSIONS IN PARENTHESES ()
 ARE IN MILLIMETERS.
 ALLOW 4" (102) BETWEEN REAR OF WATER
 COOLER AND WALL FOR VENTILATION.

